

SINCE 1979  
800-299-3001  
Sales@Mertec.net

**Mertec**  
www.mertec.net

SERVING  
California  
Nevada  
Wyoming  
Idaho ♦ Utah

*Leaders In Slurry & Bulk Material Handling, Process Instrument & Controls*

W

# Valve Solutions



Heavy Duty Pinch Valves  
General Line Pinch Valves  
Slurry Knife Gate Valves  
Smart Features  
Spares & Services

# Valve solutions


## For demanding shut-off and control applications

We deliver flow control solutions for the most demanding process conditions. Our story has started over 40 years ago making us the industry benchmark and experts on valve technology. Our robust full bore design enables effortless process flow. We provide services ranging from sizing, materials selection, installation, spare parts and maintenance to optimize the up and downstreams flow.

**1977:**

Company Larox is established

**LAROX**

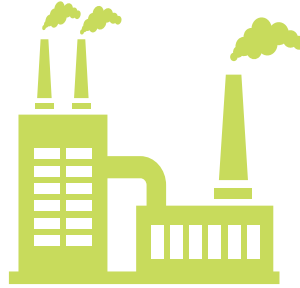


**1993:**

Company Larox Flowsys Oy is established

**LAROX FLOWSYS**

**2000:**

Product portfolio expanded to plastic body PVEG valves



**2009:**

Product portfolio expanded to Slurry Knife Gate Valves



### 4 DECADES: KNOW-HOW & INDUSTRY EXPERTISE

- Mining, metallurgy & minerals
- Construction
- Energy
- Environment
- Water & wastewater
- Chemical process industry
- Oil & offshore
- Pulp & paper
- Food & pharma

**2014:**

Flowrox biggest DN1200 knife gate valves delivered for mining application

**2016:**

Launch of Smart Solutions™



**OVER**

**150,000** products delivered Globally




2011 - Name changed

**LAROX FLOWSYS**

**FLOWROX**

## WE PROVIDE THE OPTIMAL SOLUTION:

### Ball valve

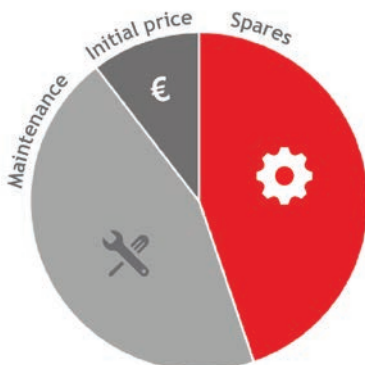

### Flowrox valve solution



The shown comparison of cost over a period of 5 years on a DN100 pinch valve feeding abrasive slurry. The valve operates 4-6 times/hour. The conventional valve is a stainless ball valve with PTFE seats.

## YOUR BENEFITS

Low Total Cost of Ownership

Low operating costs

Improved process performance

Long service intervals

Minimized downtime

Heavy duty design

# Flowrox Valve Product Portfolio

## > Pinch Valves



### Heavy duty pinch valves

- Pressure rating up to 100 bar
- Size DN25 - 800
- High cycling applications
- For isolation & control purposes



### PVG pinch valves

- Pressure rating 10 bar
- Size DN50 - 250
- Low cycling applications
- For isolation duty

## > Slurry Knife Gate Valves



### SKW

- Without flange
- Pressure rating 10 bar
- Size DN50 - 600
- Isolation duties only



### SKF

- With flange
- Pressure rating 10 bar
- Size DN80 - 1500
- Isolation duties only



### SKH

- With flange
- Pressure rating 20 bar
- Size DN80 - 600
- Isolation duties only

## > Smart Solutions™



### Enhance your performance with Smart Solutions™

- Smart valve series provide online information about the process, valve operations and condition of the valve.
- Enables advanced reporting and data analytics, making your process more reliable and transparent
- Fast analysis of faults and planning of maintenance

## > Services



### Comprehensive Valve Installation, Maintenance and Spare Services

- Site survey services
- Spare parts and component services
- Installation and maintenance services, repair services
- Analysis services / commissioning / training

# Expansion project: Saving time during start-up with 330 Flowrox valves

## Customer:


Trafigura Mining Group, MATSA mine, Spain

## Products:

330 PVE enclosed body & PVG shut-off valves

**Application:** Ore & water treatment & process water supply in copper, zinc and lead mining

**Benefits:** Increased safety, easy installation & maintenance, process reliability, light-weight products.

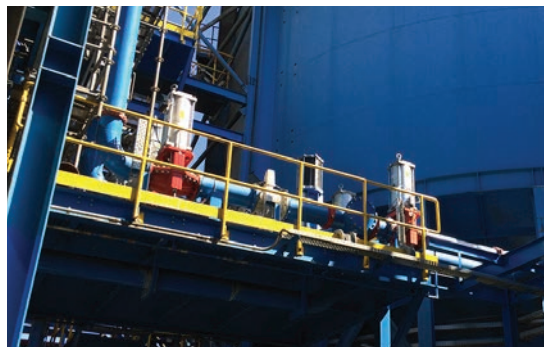

## Long-term benefits in ownership

The Tranfigura Mining Group ordered 330 Flowrox PVE enclosed body pinch valves and PVG shut-off pinch valves for various demanding flow control and shut-off duties, from ore treatment to water treatment plant and process water supply.

“When the project was engineered, we constantly had in mind that the choice of appropriate instrumentation for each application is fundamental to the process performance. We decided that all control valves and also some of the shut-off valves would be pinch valves, which finally ended up saving us a lot of time in the start-up of the plant,” says Ms. **Luisa Montes**, a Project Team Member from MATSA mine.

All installed Flowrox Pinch Valves delivered were an enclosed body type and include an SBRT valve sleeve to meet the requirements of various mediums in different process areas and to achieve the longest sleeve life time.

As the valves are self-cleaning, even if any solids are accumulated in the sleeve wall, it breaks away when the valve is operated. This is due to the flexibility of the sleeve, making the valve lifetime longer than many other competing products on the market.

The Flowrox Pinch Valves were chosen to gain long-term benefits based on low total cost of ownership. The PVE control valves at the plant are actuated by pneumatic double acting actuators with positioners. Also, all of the on/off PVG valves include limit switches for position indication.

“In the future, we are definitely expecting cost savings,” Ms. Montes states.



## OUR CUSTOMER: TRAFIGURA MINING GROUP

Trafigura Mining is a market leader in copper, lead and zinc concentrates trading. The flagship mine, Aguas Teñidas (MATSA), is located in Andalucía, Spain. In the year 2015, the production of concentrates nearly doubled to 4.4 tons per year.



## Flowrox Valve References

- > **Customer:** HUSAB Uranium Mine, Namibia
- Products:** Pinch valves
- Application:** Tailings Transfer
- Benefits:**
- Increased process reliability
  - Cost efficiency with remote valve control
  - Low total cost of ownership



- > **Customer:** Wastewater treatment plant, Warsaw, Poland
- Products:** DN500 control pinch valves
- Application:** Flow control of biological sludge
- Benefits:**
- Gentle handling due to living bacteria in sludge
  - Wide and accurate flow control range
  - Extended maintenance interval



- > **Customer:** LKAB, Sweden
- Products:** PV and PVE pinch valves
- Application:** Thickener underflow
- Benefits:**
- Reliability with abrasive slurry
  - Wide and accurate flow control range
  - Extended maintenance interval




# Heavy Duty Pinch Valves

Flowrox heavy duty pinch valves are “The pinch valves”. They are made to last and are ideal where shut-off and control applications involve abrasive or corrosive slurries, powders or coarse substances.

## Made to Last

The operating principle of Flowrox pinch valves is simple. In the open position, the valve is full bore with no flow restrictions. During closing, two pinch bars squeeze the valve sleeve shut on the centerline. The sleeve is naturally wear resistant and when particles hit the sleeve’s rubber surface, the energy is absorbed and released when the rubber bounces back.


Heavy duty pinch valves provide bubble tight shut-off even if solids have built up on the sleeve wall. When compressed, any crystallized particles flake off the sleeve surface. The full bore structure ensures free flow of the medium. The construction and materials of the three main components (sleeve, body and actuator) can be tailored to suit your process conditions.

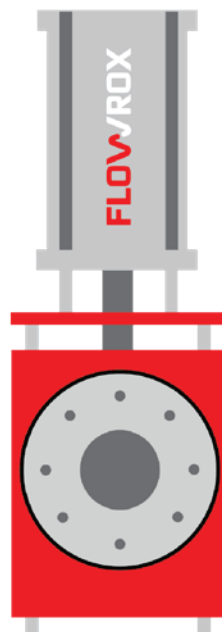

## Benefits: This Is How We Flow!

- Long service intervals
- Only one wearing part
- Excellent for dry powders
- Low maintenance cost

*Image: During closing, two pinch bars squeeze the valve sleeve shut on the centerline. See the Pinch Valve in action by scanning the QR code.*

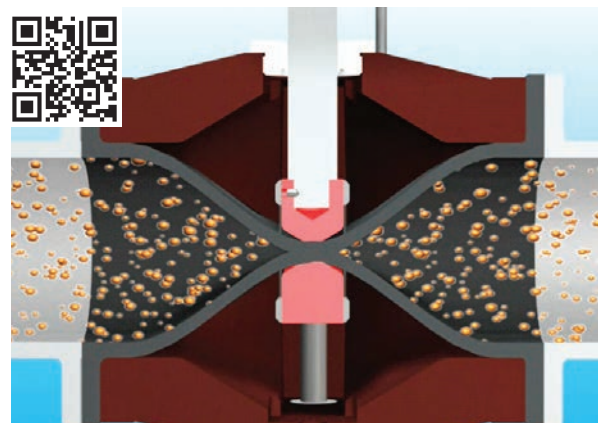

## Valve Model Selection Guide

Type	Size (DN)	Actuator	Pressure class	Flange drilling	Body material	Shape of flange	Opening tags	Auxiliaries	Sleeve material	
PV = open	25	M = manual	1 = 1 bar	1 = -	0 = GRS/Fe	type 1	L = opening tags	R = readiness for ind. limit switches	SBRT = Styrene butadiene	
PVE = enclosed	-1000	MG = manual with gear	6 = 6 bar	2 = DIN PN10	2 = AISI 316	type 3		R1 = AC/DC	EPDM = Ethylene propylene	
PVE/S = enclosed / sealed		A = pneumatic	10 = 10 bar	3 = DIN PN16	3 = aluminium	type 4		R2 = DC, PNP	NR = Natural rubber	
PVS = sealed		AB = with manual override	16 = 16 bar	4 = DIN PN25	4 = other	Determined by Flowrox		R3 = DC, NPN	NBR = Nitrile	
		AK = with el.pneum. positioner	25 = 25 bar	5 = DIN PN40	5 = polyurethane/polyamide				S = magnetic limit switches	CSM = Hypalon
		AKU = with el.pneum. positioner & pneum. spring	40 = 40 bar	6 = ANSI150					T = mechan. limit switches	EPDMB = Green liquor sleeve
		AKV = with el.pneum. positioner & mech. spring	64 = 64 bar	7 = ANSI300					Q = quick exhaust valve	CR = Chloroprene
		AKF = with integrated Festo positioner	100 =	8 = BS TABLE D					Z1 = solenoid valve, 24VDC	IIR = Butyl
		AN = with pneum. positioner	100 bar	9A = AS TABLE D					Z2 = solenoid valve, 230V, 50/60 Hz	NRF = Foodstuff natural rubber
		AU = with pneum. spring		9B = AS TABLE E					Z3 = solenoid valve, 110V, 50/60 Hz	NBRF = Foodstuff nitrile
		AV = with mech. spring		9C = JIS 10				F = Filter regulator + Gauge	HNBR = Hydrogenated nitrile	
		E = electric		9D = JIS 16				J1 = Junction box small	FPM = Fluorine rubber	
		EO = with electrical positioner		9 = OTHER				J2 = Junction box large	/M = SensoMate sleeve	
		H = hydraulic					X = must be specified	/PU = PU-coating inside the sleeve		
		HP =hydraulic with positioner						/VAC = Sleeve for suction		

Example: PVE 150A10-203LR1Z2, SBRT

## Control Valves


The Flowrox control valves are designed for demanding control applications in which conventional valves encounter problems with wear due to increased turbulence.

When the controlled flow is abrasive, it is a big advantage to have only one, wear resistant, valve part in contact with the medium. The need for maintenance and spare parts is reduced.

Controllability can be further improved with conical sleeves or smart positioners.

Flowrox control valve sizing is based on international IEC60534 standard (harmonized with ANSI/ISA S75).

Flowrox Control Valve Sizing Program is available to ease your work.

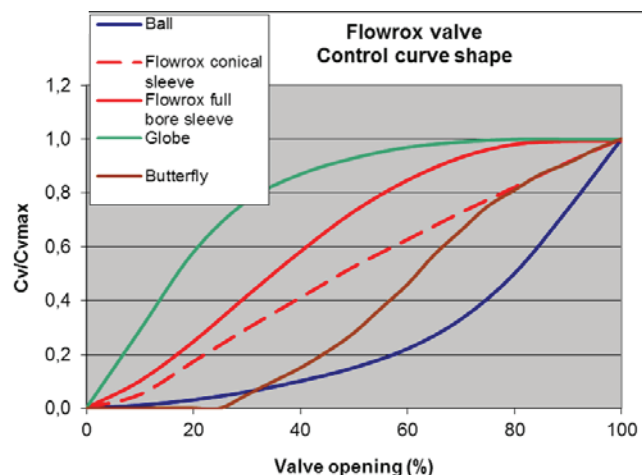


# General Line Pinch Valves

## PVG and PVEG valves

Flowrox pinch valves are robust and cost-effective valves with simple, single-sided closing mechanism. PVG valves have a strong valve body and opening tags in the sleeve as standard. PVEG valves have a corrosion resistant and light-weight plastic body.

They are ideal for low cycle applications involving abrasion, corrosion and aggressive slurries. Through the reliability and structure, they offer substantial savings based on improved performance, long service lifetime and low total cost of ownership.

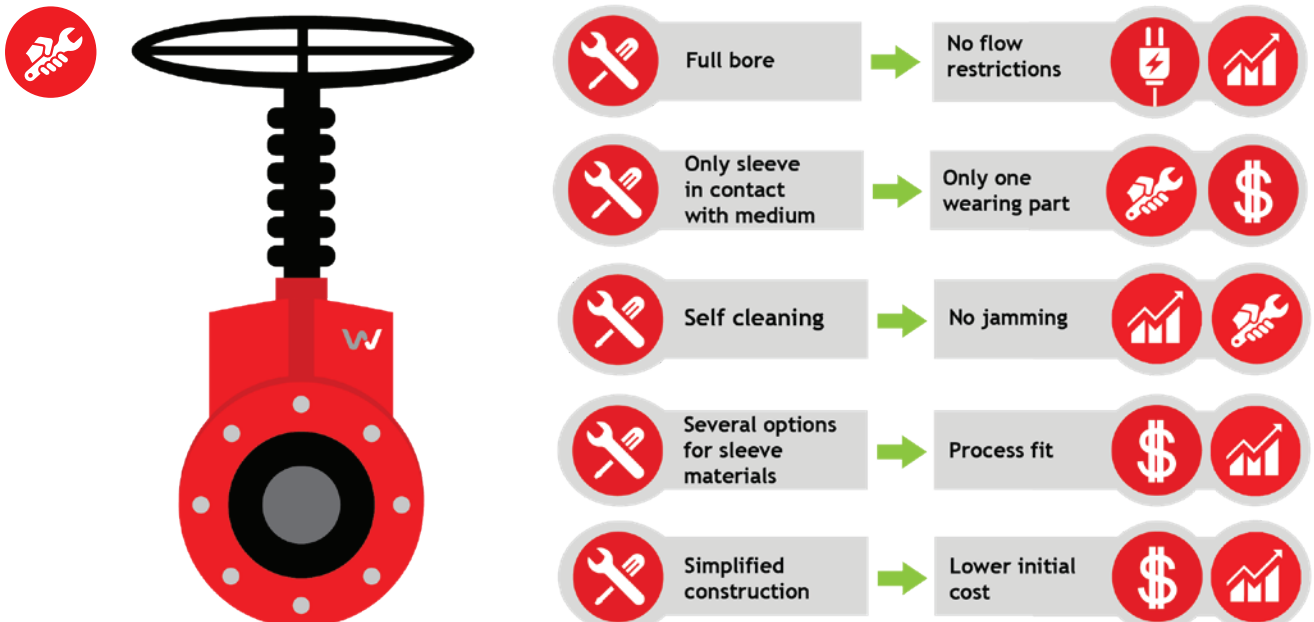

## Benefits: This Is How We Flow!

- Long service intervals
- Only one wearing part
- Excellent for dry powders
- Simple sleeve replacement

*Image: The closing element squeezes the sleeve shut against the lower body half, providing a 100 % tight shut-off. See the PVG in action by scanning the QR code.*





## PVG Valve Model Selection Guide

Type	Size (DN)	Actuator	Pressure class	Flange drilling	Body material	Sleeve material	Auxiliaries
PVG = Flowrox Pinch valve	50 - 250	M = manual A = pneumatic E = electric	4 = 4 bar 6 = 6 bar 10 = 10 bar	2 = DIN PN 10 6 = ANSI 150 9 = other	0 = cast iron	SBRT = Styrene butadiene rubber  EPDM = Ethylene propylene diene monomer	Z1 = solenoid valve, 24V DC  Z2 = solenoid valve, 230V 50/60 Hz  Z3 = solenoid valve, 110V DC  S = Magnetic limit switches

Example: PVG 50M10, SBRT

## PVEG Valve Model Selection Guide

Type	Size (DN)	Actuator	Pressure class	Flange drilling	Body material	Sleeve material	Auxiliaries
PVEG = Flowrox Pinch valve	50 - 150	M = manual A = pneumatic	6 = 6 bar 10 = 10 bar	2 = DIN PN 10 6 = ANSI 150 9 = other	5 = Polyamide	SBRT = Styrene butadiene rubber	Z1 = Solenoid valve, 24V DC  Z2 = Solenoid valve, 230V 50/60 Hz
PVEG/C = Flowrox Pinch valve	50 - 150	M = manual A = pneumatic	6 = 6 bar 10 = 10 bar	2 = DIN PN 10 6 = ANSI 150	5 = Polyamide	EPDM = Ethylene propylene diene monomer	Z3 = Solenoid valve, 110V DC  S = Magnetic limit switches

Example: PVEG 150M10-25



Image: PVEG50M manual polyamide body pinch valves in a hydrocyclone at Kara Mine, TMM, Tasmania, Australia.


# Knife Gate Valves

Heavy Duty Slurry Knife Gate Valves isolate flow, even in the most demanding process conditions. The complete valve is built around an ease-of-maintenance concept.

## Slurry Knife Gate Valves

The designs of Flowrox Slurry Knife Gate Valves are based on the years of experience Flowrox has gained, providing reliable solutions for abrasive and corrosive process applications. They feature a load distribution ring that prevents over compression and ensures tight sealing between the sleeve and the valve gate. To add to the ease of maintenance, the load distribution ring has been integrated into the sleeves of the valve.

The universal tower design of the valve accommodates most actuator types, allowing for actuator interchangeability. The tower also ensures that the top plate, body and actuator are always aligned and that the gate is in the right position. The valve body itself is a one-piece casting, eliminating the need for sealing between the body halves.

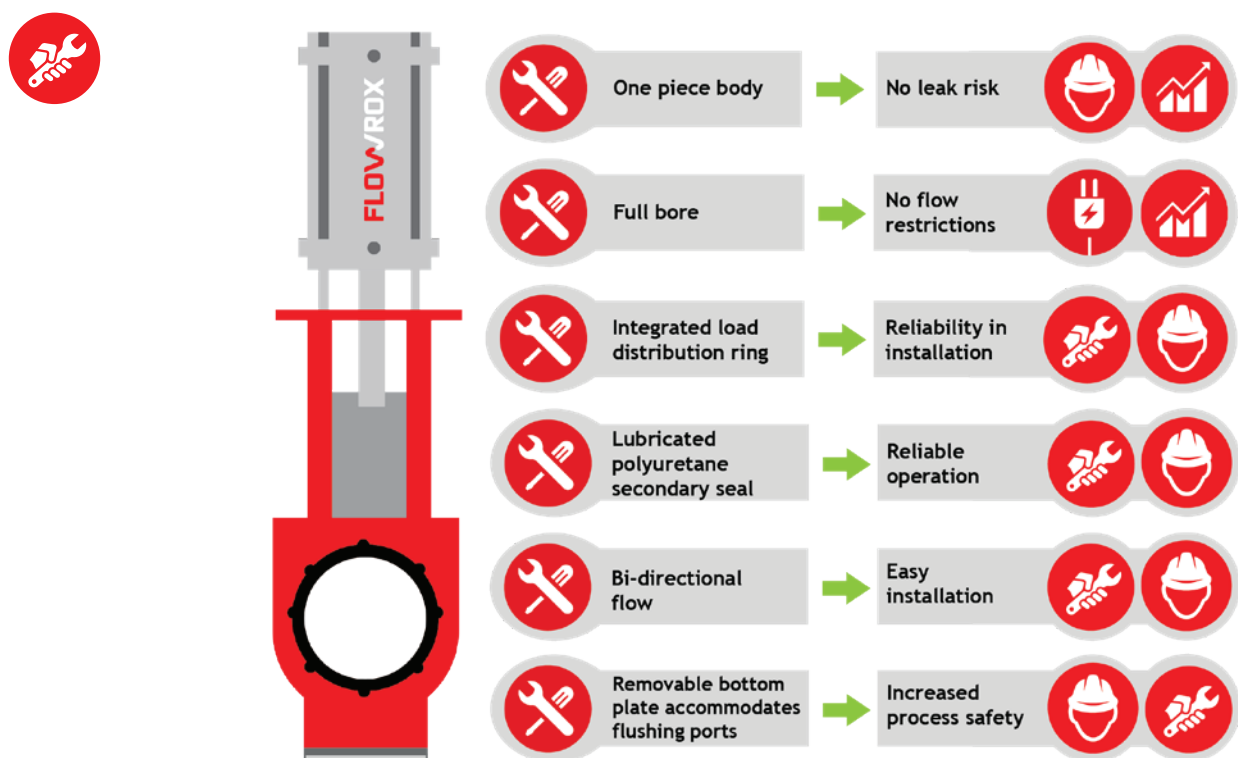

## Benefits: This Is How We Flow!

- Small face-to-face dimension
- Easy installation
- Available in large size scale
- Low maintenance cost

*Image: Elastomer sleeves on both sides of the gate provide a tight shut off. See the Flowrox knife gate valve in action by scanning the QR code.*



## SKW / SKF Valve Model Selection Guide

Type	Size (DN)	Actuator	Pressure class (PN)	Flange drilling	Body material	Gate material	Ring sleeve material	Auxiliaries
SKW SKF	50 - 600	M = manual MG = manual with gearbox A = pneumatic AU = pneumatic with pneumatic spring H = hydraulic E = electric	10 = 10 bar standard	2 = DIN PN10 3 = DIN PN16 4 = DIN PN25 5 = DIN PN40 6 = ANSI150 7 = ANSI300 9 = other	0 = Cast iron/Welded steel 2 = AISI 316 4 = other	S = stainless steel Other on request COATING: 0 = nothing	NR = natural rubber +75°C max NBR = nitrile +100°C max EPDM = ethylene propylene +120°C max	R = readiness for inductive limits R1 = AC/DC R2 = DC, PNP R3 = DC, NPN Z1 = solenoid valve, 24V DC Z2 = solenoid valve, 230V, 50/60 Hz Z3 = solenoid valve, 110V, 50/60 Hz G = guard


Example:SKW 100M10-20S0-NR-G

## SKH Valve Model Selection Guide

Type	Size (DN)	Actuator	Pressure class (PN)	Flange drilling	Body material	Gate material	Ring sleeve material	Auxiliaries
SKH = High pressure slurry knife gate valve	80 - 600	MG = manual with gearbox A = pneumatic AU = pneumatic with pneumatic spring H = hydraulic E = electric	20 = 20 bar standard	2 = DIN PN10 3 = DIN PN16 4 = DIN PN25 5 = DIN PN40 6 = ANSI150 7 = ANSI300 9 = other	0 = Cast iron/Welded steel 2 = AISI 316 4 = other	S = Stainless steel Other on request COATING: 0 = nothing	NR = natural rubber +75°C max NBR = nitrile +100°C max EPDM = ethylene propylene +120°C max	R = readiness for inductive limits R1 = AC/DC R2 = DC, PNP R3 = DC, NPN Z1 = solenoid valve, 24V DC Z2 = solenoid valve, 230V, 50/60 Hz Z3 = solenoid valve, 110V, 50/60 Hz G = guard

Example:SKH 200E20-30S0-NR

## Slurry Knife Gate Design

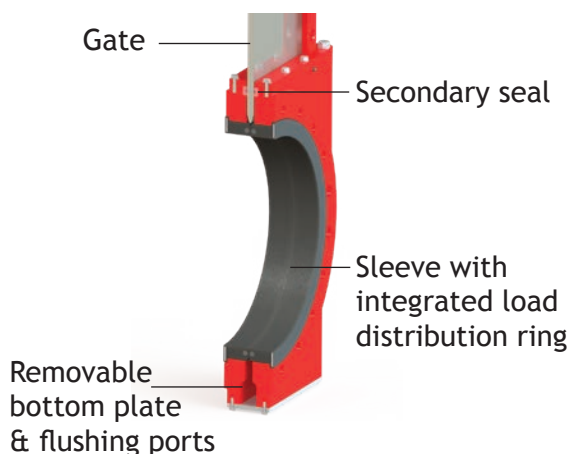

Flowrox Knife Gate Valves are suitable for large-scale project deliveries with a selection of Flowrox pumps and valves.

# Smart Features

Enhance your performance with Smart Solutions™. Flowrox Smart features can be included into any old or new delivery. The Smart valves are next generation solutions delivering data and information in order to provide reliable and cost-efficient production. Real time information from site results in optimized production with maximized output and minimized unplanned shutdowns.

## Smart Solutions™

Flowrox Smart valves provide you with online information about their condition, process and operations.

Flowrox Smart PVE is based on the reliable PVE valve and is equipped with a new smart positioner for detailed information about valve operations. The SPVE includes a leak sensor and various embedded instruments for additional information.

Optional SensoMate Smart sleeve detects the wearing before actual sleeve failure.

The Flowrox Smart Valve combined with the Flowrox Malibu™ IIoT user interface enables advanced reporting and data analytics, making your process more reliable and transparent. Malibu is accessible on any device with an Internet browser.



## Technical Features

- Pre-fail indications
- Real time data in Flowrox Malibu
- Pressure measurement at the valve inlet/outlet
- Medium temperature measurement
- Leak sensor
- Connectivity with 3G/4G, WIFI or LAN

## From Features to Benefits

- **Online valve performance monitoring**
  - ➔ Detect issues before they become a problem
- **Automatic pre-fail indications**
  - ➔ Savings in maintenance & unexpected shutdown costs
- **Analytics tools**
  - ➔ Help you make the correct decisions fast
- **Advanced reporting tools**
  - ➔ Access to detailed asset performance information
- **Easy accessibility via Internet**
  - ➔ Access where ever you are



*The Flowrox smart instrumentation can be retrofitted to automatic pinch valves.*



**Flowrox Smart Valves:**

*The SPVE series provides online information about the process performance and condition of the valve.*

*The Flowrox Smart Valve combined with Flowrox Malibu enables advanced reporting and data analytics, making your process more reliable and transparent.*

# Spares & Services

Sleeves: The core of our valves

Our technologically advanced Flowrox sleeves guarantee high resistance to wear and corrosion, trouble-free operation and extended lifetime.

## Robust Heart of the Pinch Valve

The handmade sleeve has a reinforced construction, making it the pressure-containing part of the valve.

Standard Flowrox PV, PVE and PVG sleeves are equipped with opening tags to ensure full valve opening in all process conditions.

## Sleeves for Knife Gate Valves

The sleeve is a moulded part with a reinforcement steel ring integrated near the sealing area. The flange of the sleeve is reinforced with a load distribution ring to ensure even compression.




## Special Sleeve Features

- Conical sleeve for control valves
- Suction sleeve for negative pressure applications
- SensoMate sleeve detecting and signalling critical wear
- Polyurethane lined sleeve with improved protection against wear in abrasive control applications
- Foodgrade rubber for FDA requirements

Opening tags

Reinforcing cords

Wear-resistant inner lining

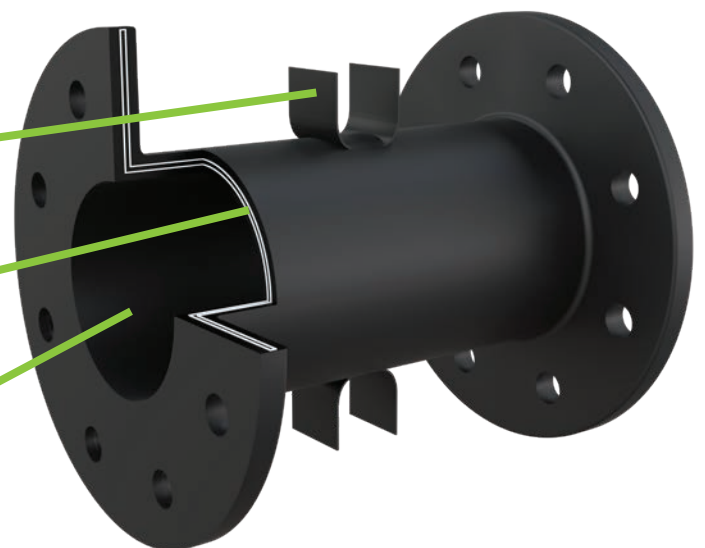

*To cover a wide range of applications, several rubber compounds are available.*



*Flowrox valves are available in various sizes and models for various applications. Flowrox Services supports you throughout the entire life cycle.*



# Services

We offer prompt support, spare parts and services in order to maximize your performance.

We manufacture and deliver original spare parts and components for all Flowrox products (valves, hose pumps, PC pumps).

- On-time trouble-free delivery of spares and services
- Cost savings through optimized service cycles and reduced downtime of equipment
- Longer life cycles for equipment

